


10W high power led

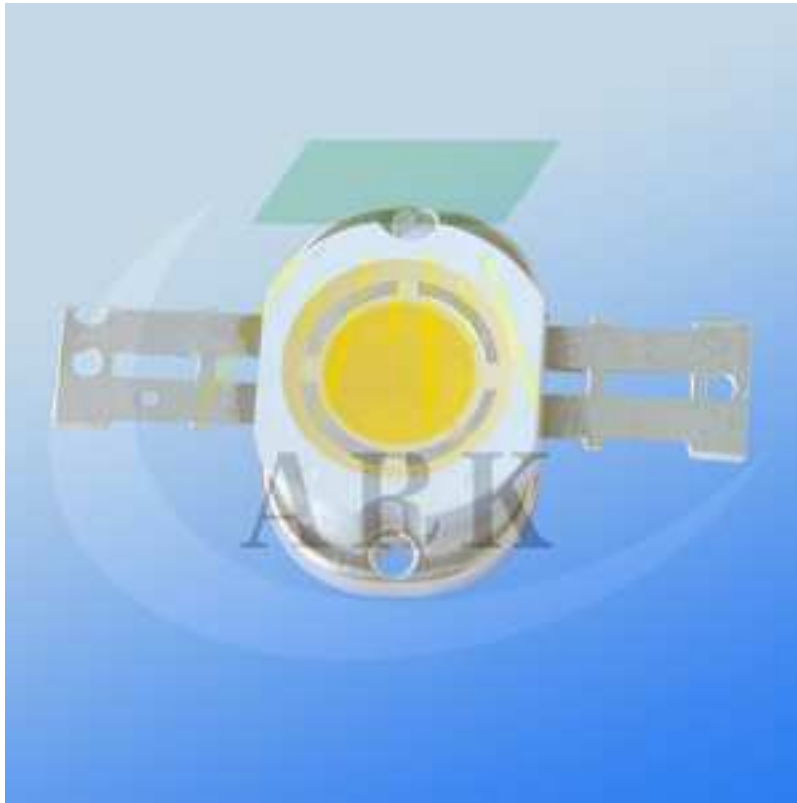

Feature:

1. High light brightness arrives 600lm-900lm
2. Low light attenuation
3. Long operating life up to 50,000hs
4. High color rendering
5. Flare with well-balanced
6. Green environmental and more energy saving
7. Color can be available in white,warm white,blue,green,yellow,red and infrared
8. RoHS compliant
9. Excellent after-sales service and free 3-years maintainance

Specification

Item No	Lens Color	Emittin g color	Current(mA)	Forward Voltage(V)	Viewing Angle(deg.)	Wavelength(nm)	Luminous Flux(lm/W)
FZ-P010SWEX-XXXTC	Water clear	Pure white	1000	9-12	140	5500-8000	60-90
FZ-P010WWEX-XXXTC	Water clear	Warm white	1000	9-12	140	2300-5500	60-90
FZ-P010BHEX-XXXTC	Water clear	Blue	1000	9-12	140	450-475	15-40
FZ-P010GHEX-XXXTC	Water clear	Green	1000	9-12	140	490-530	60-90
FZ-P010AYEX-XXXTC	Water clear	Yellow	1000	6.5-7.5	140	585-595	30-60

FZ-P010OREX-XXXTC	Water clear	Red	1000	6.5-7.5	140	620-630	30-40
FZ-P010IREX-XXXTC	Water clear	Infrared	1000	4-6	140	835-945	/

1. Absolute Maximum Ratings

(Ta=25°C)

Item	Symbol	Absolute Maximum Rating	Unit
Forward Current	IF	1000	mA
Pulse Forward Current	IFP	1500	mA
Allowable Reverse Current	IR	10	uA
Power Dissipation	PD	1	W
Operating Temperature	Topr	-30~+85	°C
Dice Temperature	Tstg	-40~+100	°C
Soldering Temperature	Tsod	260	°C

◇ IFP Conditions : Pulse Width ≤10msec. and Duty ≤1/10

◇ Soldering Time : ≤5 sec.

2. Electrical/Optical Characteristics

(Ta=25°C)

Item	Symbol	Condition	Min	Typ	Max	Unit
Forward Voltage	VF	IF=1000[mA]	9.0		12.00	V
Allowable Reverse Current	IR	VR=5[V]	0		10	uA
Luminous Flux	Φv	IF=1000[mA]		500	900	lm
Temperature Color	TC	IF=1000[mA]	6500		7500	K
Chromaticity Coordinate	x	IF=1000[mA]		0.45		
	y	IF=1000[mA]		0.40		
Viewing Angle	2θ1/2	IF=1000[mA]		140		

◇ Please refer to CIE 1931 chromaticity diagram

◇ Viewing Angle Measurement allowance is ±5%

3. Ranking

(Ta=25°C)

Item	Symbol	Condition	BIN CODE	Min	Max	Unit
Forward Voltage	VF	IF=1000[mA]	E	2.8	3.0	V
			F	3.0	3.2	
			G	3.2	3.4	
			H	3.4	3.6	
			I	3.6	3.8	
			J	3.8	4.0	
Luminous Flux	Φv	IF=1000[mA]	P	500	600	lm

			Q	600
			R	800

- ◇ Forward Voltage Measurement allowance is $\pm 3\%$
- ◇ Luminous Intensity Measurement allowance is $\pm 10\%$

4. Typical Electrical Optical Characteristics Curves((Ta=25°C Unless Otherwise Notes)

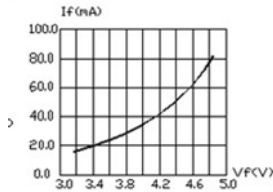


FIG1 FORWARD CURRENT VS. FORWARD VOLTAGE

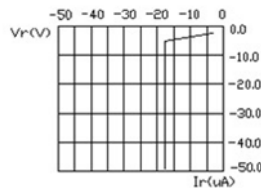


FIG2 REVERSE CURRENT VS. REVERSE VOLTAGE

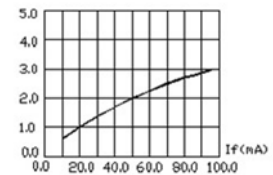


FIG3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT




FIG4 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH.







FIG5 MAXIMUM FORWARD CURRENT VS. AMBIENT TEMPERATURE(Tjmax=105°C)

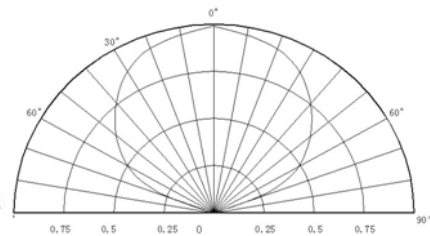


5. Inner Instructure

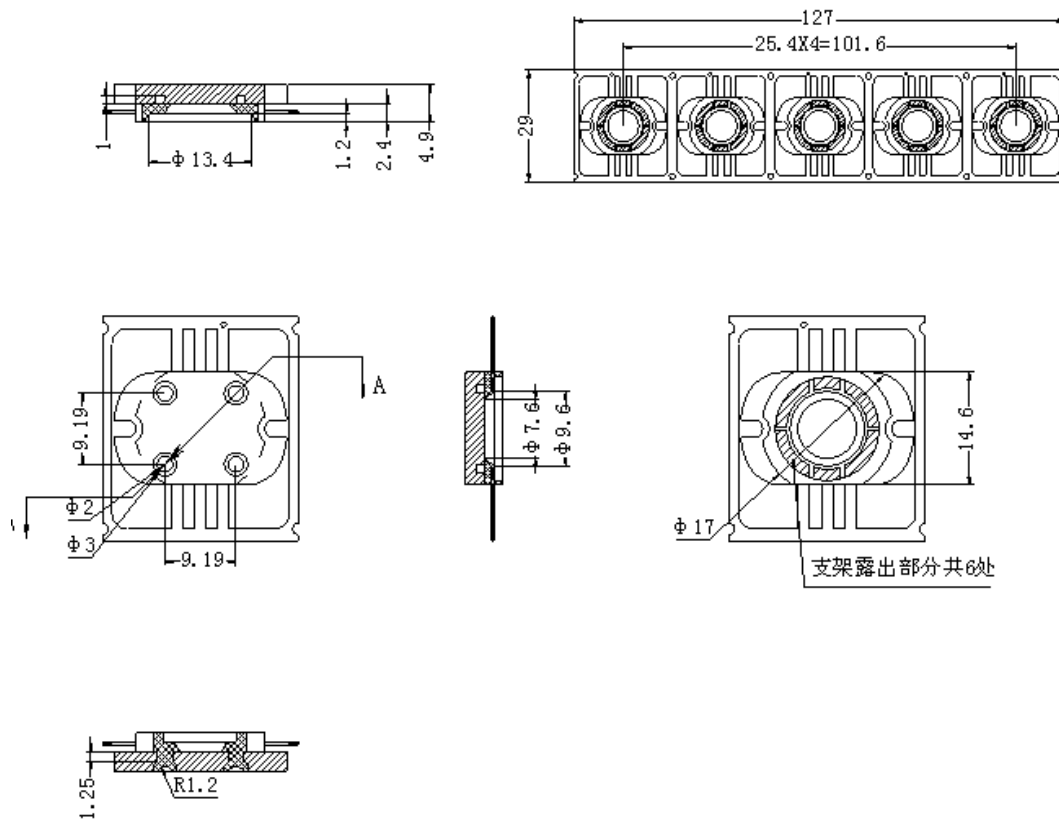

6. Tested Lumens Data

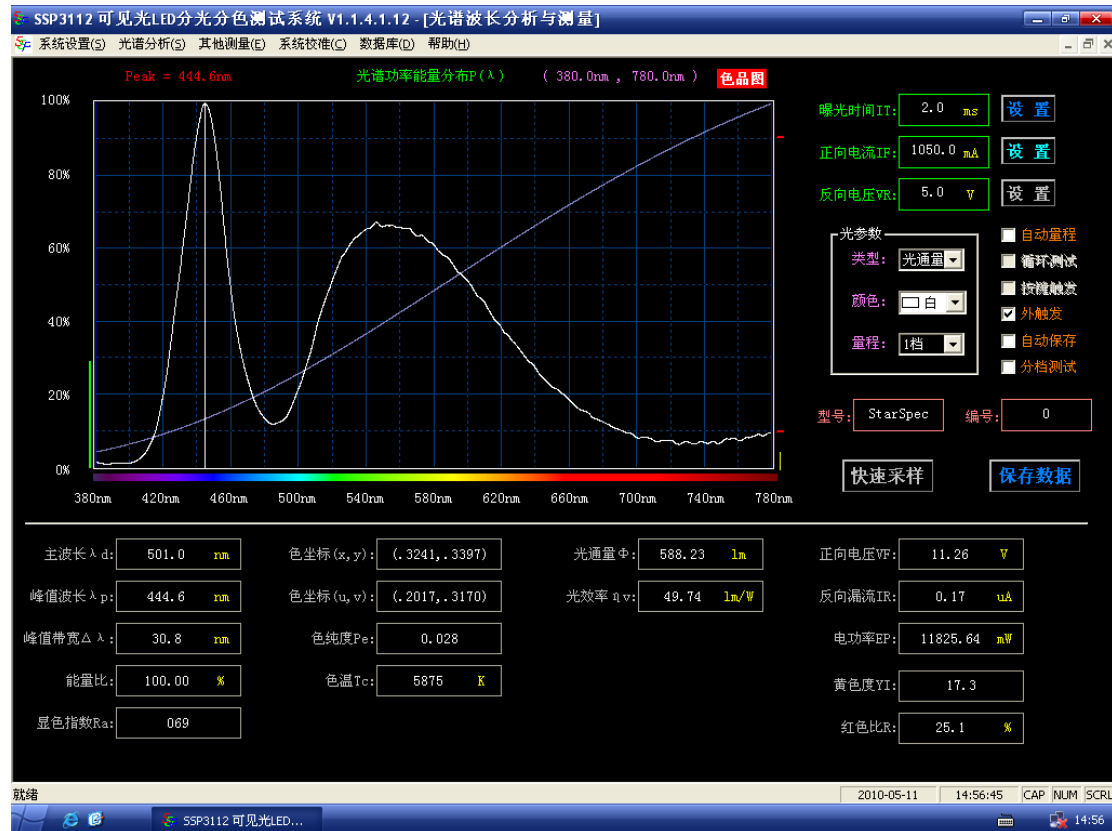

7..Packing Measurement

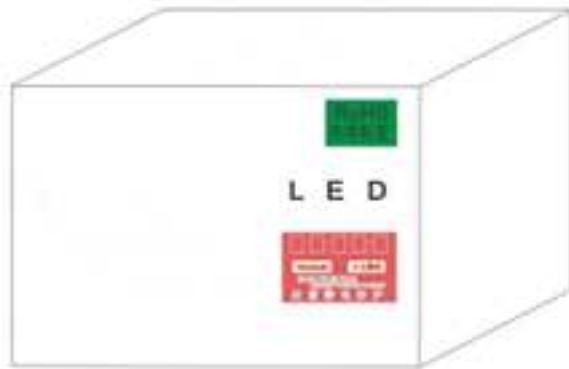

Carton Packing

NOTES:

1. Dimensions are in mm.
2. There are 50pcs emitters in a inner cardboard
3. There are three kind of cartons: 0.5k,1k,2k
4. A pc emitter to a shockproof particular plastics bag

8.Application:

- Reading lights

- Portable flashlight
- Up-lights and Down-lights
- General lights
- Contour lights
- Ceiling lights
- Garden lights
- Streetlights
- Mining lights
- Decoration lights
- Architectural lighting

